FERVE F-1902



CONTROL OF THE BATTERY IN YOUR HAND

www.ferve.com

FERVE F-1902


BATTERY / STARTING / CHARGING SYSTEM ANALYZER

CHECKING

- Whether the battery is in good condition or defective.
- Cold-start current capacity of the battery.
- Starting system of the vehicle.
- Charging system of the vehicle.

TOTAL RELIABILITY

- Microprocessor controlled.
- Automatic temperature compensation.
- Protection against polarity errors.
- No internal battery cells.
- Fully illustrated instruction manual.



FOR A WIDE RANGE OF BATTERIES

Lead-acid liquid batteries, standard sulphuric acid



Non-maintenance liquid batteries



Silver calcium batteries



Gel acid silicone + sulphuric acid batteries




Valve regulated lead-acid batteries



AGM batteries (absorbed glass mat electrolyte)

FEATURES

- Range: 12 V, from 25 to 200 Ah
- Dimensions:
 - 119 x 68 x 19 mm
- Weight: 180 g

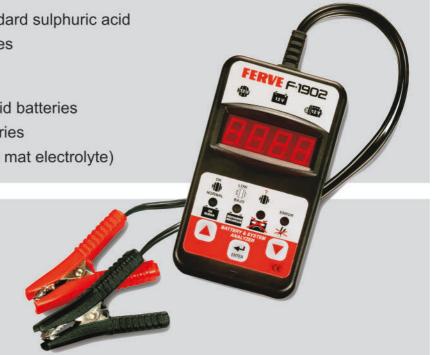

PRECISE, EASY TO USE AND ECONOMICAL